




Specification Page

UTILITY DUMP

DUMP TRAILERS

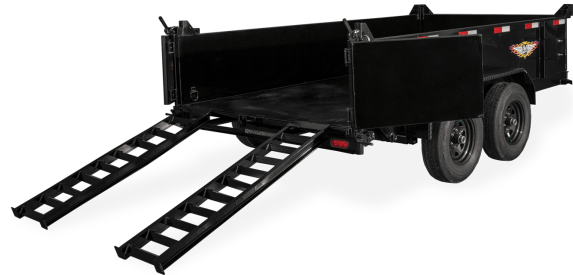

	76" x 10' (10K)	76" x 12' (10K)
Model	H7610UD-24-100	H7612UD-24-100
GAWR (lb./axle)	5200	5200
GVWR (lb.)	9900	9900
Curb Weight (lb.)	2790	2870
Payload Capacity (lb.)	7110	7030
Frame Construction	5" Channel	5" Channel
Crossmembers	3" Channel	3" Channel
Sides	24" Tall, 12-Gauge Steel	24" Tall, 12-Gauge Steel
Tongue Construction	5" Channel	5" Channel
Coupler	2 5/16" A-frame	2 5/16" A-frame
Coupler Height	17 1/2"	17 1/2"
Safety Chains and Hooks	Yes	Yes
Jack	7K Rated Drop Leg	7K Rated Drop Leg
Axle Type	Leaf Spring Brake	Leaf Spring Brake
Brakes	4-Wheel Electric	4-Wheel Electric
Breakaway Kit	Yes	Yes
Tires	ST225/75R15 'D'	ST225/75R15 'D'
Wheels	15", 6 on 5.5	15", 6 on 5.5
Trailer Plug	7-Way	7-Way
Exterior Lighting	LED	LED
Decking	12-Gauge Steel	12-Gauge Steel
Gate Style	Barn Door Gate	Barn Door Gate
Ramp Style	Ramps in Carrier	Ramps in Carrier
Ramp Length x Width	5' x 14"	5' x 14"
Load Capacity (lb.)	6500	6500
Overall Length	14'-1"	16'-1"
Overall Width	97"	97"
Overall Height	54 1/2"	54 1/2"
Bed Height	24"	24"
Bed Length	10'	12'
Bed Width	76 1/4"	76 1/4"

STANDARD FEATURES

5" Steel Channel Frame 3" Steel Channel Crossmembers 12-Gauge Steel Sides, 24" Tall 5" Steel Channel Tongue 2 5/16" A-Frame Posi-Lock Coupler Dual Safety Chains and Hooks 7K Drop Leg Jack 12-Gauge Smooth Steel Deck	(4) D-Ring Tie Downs Barn Door Gate with Spreader Function (2) 3" x 5' Heavy Duty Ramps in Carrier Formed Tread Plate Fenders Spring Brake Suspension with Easy Lube Hubs Radial Tires on Black Steel Wheels Sealed Wiring Harness Full LED, DOT Compliant Lighting	Tarp Brackets Spare Tire Mount 3" x 24" Single Stroke Ram Cylinder Power Up, Power Down 12V Hydraulic Pump (3000 PSI) Tongue Mounted Pump Box 12V Deep Cycle Battery 2-Button Corded Remote
---	--	--